



CONCRETE FIXING & LAYOUT REQUIREMENTS

CONCRETE FIXING EXAMPLE

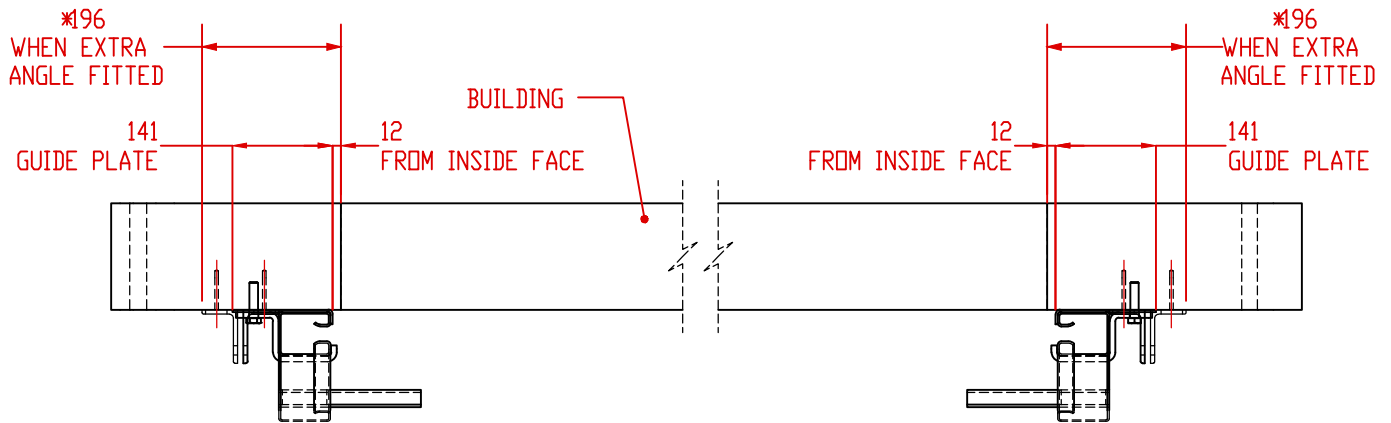

MOTOR, SIDE ALLOWANCE << SWITCHABLE >> NON-DRIVEN, SIDE ALLOWANCE

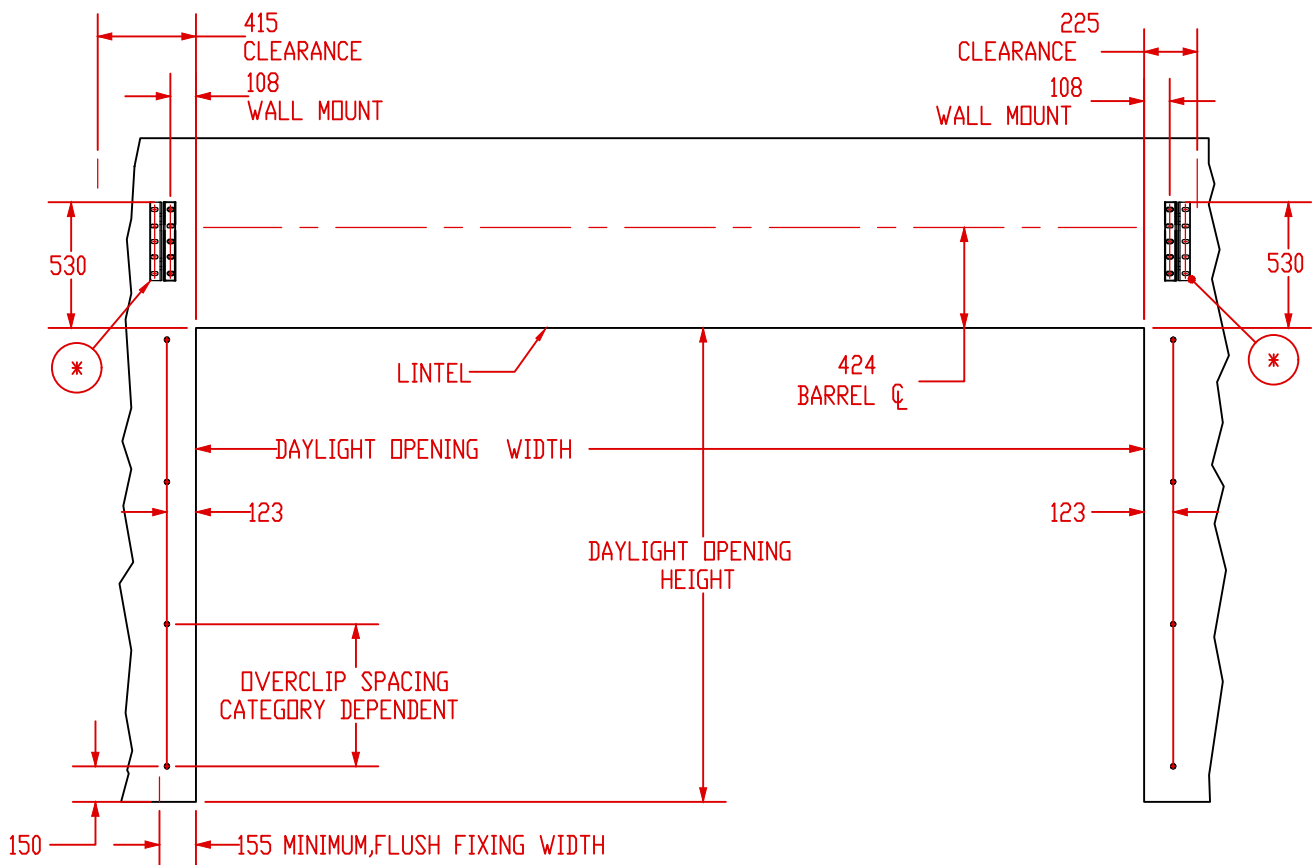

NOTES

- STANDARD LAYOUT SHOWN
- ALL GUIDE AND HEAD FIXINGS M12
- CONCRETE FIXINGS REQUIRE A DRILL HOLE DEPTH OF 75mm INTO CONCRETE
- STRUCTURES SHOWN INDICATIVE ONLY
- SEEK STRUCTURAL ENGINEERING APPROVAL (CLIENT CARE)
- * FIXING REQUIRED FOR EXTRA ANGLE WHEN OPENING GREATER THAN 36m²

A-000-100_SPRUNG

Sheet 2 of 5



64 9 273 4970
43a HOBILL AVE
WIRI
AUCKLAND
NEW ZEALAND